



10.829.045

07.19.04



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, F.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 24 June 2004


THIS PAGE BLANK (USPTO)



05JUN03 E012523-2 001559
P01/7700 0.00-0312872.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

RRH/Prineppi/Floss 2

2. Patent application number

(The Patent Office will fill in this part)

0312872.5

05 JUN 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Frank Joseph Prineppi
PMB 341
1323 SE 17th Street
Fort Lauderdale, Florida
USA 33316

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

6354476002

4. Title of the invention

Improvements in and relating to Dental Flossers

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WYNNESTONES, LAINE & JAMES,
22 ROONEY ROAD,
CHERTHAM,
WIMBORNE,
DORSET.

PFS1/77
21/6/04
2.

Patents ADP number (if you know it)

1792001.

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Statement of inventorship is not needed.

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 0

Abstract 0

Drawing(s) 9

Handwritten signature

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Wynne - Jones, Laine & Jones

4/6/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Richard R Halstead
01242 515 807

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Improvements in and relating to Dental Flossers

This invention relates to dental flossers and more particularly to electrically powered dental flossers which reciprocate a length of floss for cleaning in-between teeth and over gums.

5 Dental flossers are known which include a bow for supporting a short length of floss and an electrically powered version of this is shown in US 5,762,078 in which a flosser head for a toothbrush driver incorporates a mechanism for reciprocating the flosser bow linearly with respect to the major axis of the toothbrush driver. However, it has been found that a preferred
10 configuration is for the floss to be stretched over a pair of prongs for reciprocation laterally with respect to the major axis of the toothbrush driver and a number of arrangements have been proposed, such as that shown in US 5,085,236 where a dental flossing attachment adapted to be mounted on a drive shaft of an electric toothbrush driver incorporates a floss supply spool and a
15 floss take-up spool at the base of the prongs in the attachment. This obviates the need for threading of the floss every time new floss is required, through the use of a floss advancing mechanism, the entire arrangement being disposable so that when fresh dental floss is exhausted the dental flossing attachment is removed and discarded, with a new attachment then being snapped into place
20 on the toothbrush driver as desired.

The present invention provides in a first aspect a dental flosser attachment for a toothbrush driver in which dental floss from a spool on or in the attachment is fed via a floss quick release locking mechanism to a floss receiving end of one of a pair of prongs extending from the body of the

attachment to a floss receiving end of the other prong and back to the quick release mechanism such that the free end of the floss may be pulled to tension the floss between the prongs, whereafter the quick release mechanism is releasably locked to retain the tension of the floss therebetween, including
5 across the prongs, the quick release mechanism being mounted for reciprocable rotation relative to the prongs to thereby cause the floss to oscillate therebetween when the flosser attachment is activated by the toothbrush driver.

Preferably, the dental flosser attachment is driven by a motor via a drive train in which circular motion is translated into oscillating or reciprocating
10 movement, such as by the use of a bell-crank mechanism or a crown gear and associated spur gear, to which crown gear is eccentrically mounted a drive pin attached to one end of a drive link, the other end of which is attached to the quick release mechanism and/or a platform on which a quick release mechanism is mounted.

15 Conveniently, the quick release mechanism may itself comprise a pair of fixed clamp jaws, against each of which a pair of slideable clamp jaws are engageable to trap respective parts of a length of floss therebetween, the intermediate length of floss being at least partially supported by the prongs of the flosser attachment to enable flossing by a user of the combination flosser
20 attachment and toothbrush driver. Preferably, the slideably mounted clamp jaws have cam surfaces co-operable with projections on or in a rotatable knob adjacent thereto such that upon partial rotation of the knob in one direction the slideable jaws are forced apart so as to engage with the fixed clamp jaws or floss therebetween. Conveniently, the slideable clamp jaws are biased to their

open position by means of a spring arm which may conveniently be made of nylon. The spring arm may comprise two springs, one for each slideable clamp jaw, and may further be integrally formed with a centrally disposed collar relative to the rotational axis of the knob.

5 In an alternative embodiment, the slideably mounted clamp jaws may be forced to their closure position against the fixed clamp jaws by means of an over-centre cam locking arrangement including a rotatable drive plate having diagonally opposite cam surfaces which engage innermost surfaces of the slideable clamp jaws such that upon rotation of the drive shaft in one direction
10 the jaws are forced apart to engage with the fixed clamp jaws or floss therebetween. Conveniently, drive links are attached to the drive plate to provide an over-centre cam locking arrangement whereby the slideable clamp jaws are retained in their locked position when the drive plate is rotated slightly beyond the point by which the slideable clamp jaws are in their initially locked
15 positions, such that upon rotation of the drive plate in the opposite direction the slideable jaws become unlocked and can be returned to their original open position.

 In a further alternative embodiment, the quick release mechanism may be in the form of a slotted disc in which a pair of symmetrically disposed spiral slots
20 act as cam surfaces co-operable with projections, such as drive pins, attached to the slideable clamp jaws, either directly or indirectly, such that upon rotation of the slotted disc the slideable jaws are forced to move from an open to a closed position relative to the fixed jaws and vice versa.

In accordance with a second aspect of the invention there is provided an electrically powered flosser comprising a body portion, a head portion from which extend a pair of prongs for receiving floss therebetween, the head portion including a quick release mechanism for releasably locking a length of floss
5 between the prongs of the flosser, the quick release mechanism being mounted for reciprocable movement such that floss between the prongs oscillates on movement of the quick release mechanism when locked, the quick release mechanism being drivingly connected to a motor in the body portion.

The invention will now be described, by way of example only, with
10 reference to the accompanying drawings in which:

Figure 1 is a front perspective view of a dental flosser attachment for a toothbrush driver showing the quick release mechanism in its open, unlocked, position,

Figure 2 is a view corresponding to that of Figure 1 showing the quick
15 release mechanism in its closed, locked, position,

Figure 3 is a perspective view of the attachment of Figure 1 from the front and other side showing part of the locking button assembly removed,

Figure 4 is a top view to that shown in Figure 3, showing part of the quick
release mechanism exposed,

20 Figure 5 is an underneath view of part of the locking mechanism,

Figure 6 is a perspective view showing the drive train from an electric motor (not shown) to the quick release mechanism,

Figure 7 is a top plan view of the arrangement of Figure 6 with part of the locking mechanism removed,

Figure 8a is a plan view of an alternative quick release mechanism shown in its unlocked position,

Figure 8b is a schematic plan view of the quick release mechanism of Figure 8a in its over-centre locked position,

5 Figure 9a is an exploded sectional elevation of the quick release mechanism of Figure 8a along the line x-x,

Figure 9b is a sectional elevation along the line y-y of part of the quick release mechanism of Figure 9a, and

Figure 10 is a plan view of a further alternative quick release mechanism.

10 Referring firstly to Figures 1 to 5, a flosser head attachment shown generally at 1 includes a body portion 2 for fitting to the end of an electrically operated toothbrush driver (not shown) in place of a toothbrush attachment, the body portion 2 containing a spool of dental floss (not shown), from which spool of floss extends a continuous line of floss 3, initially through a quick release
15 mechanism shown generally at 4 to a floss receiving end 5 of one of a pair of prongs 6 and then via a floss receiving end 7 of the other prong back to the quick release mechanism 4, around a peg 8 extending from the body portion 2 and thereafter into a notch 9 in the body portion 2, which notch includes at the base thereof a blade (not shown) for cutting used lengths of floss 3 as required.

20 The quick release mechanism 4 comprises an elliptical pivotally mounted clamp platform 10 having fixed clamp jaws 11, 12 at respective ends thereof, against which oppositely disposed slideably mounted clamp jaws 13, 14 (best seen with reference to Figures 3 to 5) can bear to releasably capture or lock the line of floss 3 when a rotatable button or knob 15 is rotated to the position shown

in Figure 2, in which position the length of floss 3a trapped between the clamp jaws 11, 13 and 12, 14 prevent further linear movement of the floss 3a relative to the quick release mechanism 4.

5 The outer sides of the prongs 6 are channel shaped such that when the prongs 6 are placed into the mouth of a user of the device respectively opposite portions of the length of floss 3a do not rub against the inside of the mouth of the user in these regions.

10 Figures 3 to 5 collectively show how the quick release mechanism for the floss 3 works. In Figures 3 and 4 the knob 15 has been removed to reveal the slideably mounted clamp jaws 13, 14 disposed between the fixed clamp jaws 11, 12 on the moveably mounted platform 10. The slideably mounted clamp jaws 13, 14 are received between respective side walls 16, 17 of the platform 10 and each is connected to the other via a pair of resiliently deformable arcuate spring arms 18, 19 integral with and extending outwardly from a central collar 20 keyed to a centrally disposed drive shaft 21 to which the platform 10 is also drivingly secured in a manner to be explained with reference to Figures 6 and 7. 15 Each of the slideable clamp jaws 13, 14 have respective cam surfaces 22, 23 by which a pair of diagonally opposite pins 24, 25 (shown in Figure 5) on the underside of and protruding from the knob 15 can force the slideable clamp jaws 13, 14 outwardly towards the fixed clamp jaws 11, 12 when the knob 15 is 20 rotated to the position shown in Figure 2, whereafter the pins 24, 25 then rest in respective detents 26, 27 to releasably lock the floss 3 against linear movement until the knob 15 is returned to the position shown in Figure 1. A stop member 28 is provided on slideable clamp member 13 to prevent the knob 15 from being

rotated too far.

Figure 5 is an underside view of the knob 15, slideable clamp jaws 13, 14 and associated spring arms 18, 19 and collar 20, from which it will be apparent that upon rotation of the knob 15 and hence pins 24, 25 in the anticlockwise direction arrowed, the pins rise up the cam surfaces 22, 23 on the slideably mounted clamp jaws 13, 14 to force them apart in opposite directions, as arrowed, the spring arms 18, 19 providing for their return to the position shown when the knob 15 is returned also to the position shown.

In Figures 6 and 7 there are shown respective views of the drive train from a motor (not shown) to the moveably mounted platform 10, shown in Figure 6 with the knob 15 in place and in Figure 7 without it in place. A drive shaft assembly shown generally at 29 is secured to the inside of the body portion 2 (not shown) by a bushing 30 and ends with a spur gear 31 secured to the end thereof for rotation therewith. The spur gear 31 meshes with a crown gear 32 mounted on a spindle 33 so that rotation about the major axis of the drive shaft assembly 29 is converted into rotation about the major axis of the spindle 33.

Extending from the upper end of the crown gear 32 is an eccentrically projecting drive pin 34 (seen more clearly with reference to Figure 7) to which is attached a drive link 35, the other end of which is secured to a secondary drive pin 36 extending from an edge region of a drive plate 37 fixed for rotation about a shaft 38 and connected, in turn, to the drive shaft 21 shown in Figure 4, which itself is fixed for rotation with the moveably mounted platform 10. Accordingly, upon rotation of the spur gear 31 in either direction, and by virtue of the eccentrically mounted pin 34 and link 35, purely rotational movement of crown

gear 32 is translated into an oscillating movement of drive plate 37 and hence, via drive shaft 21, the moveably mounted platform 10, which therefore twists back and forth about the axis of the drive shaft 21. In doing so, floss 3a trapped between the clamp jaws 11, 13 and 12, 14 when the quick release clamp mechanism is in its locked position, as shown in Figure 2, is pulled back and forth over the prongs 6 in consecutively opposite directions so that that portion of floss 3a between the prongs 6 can therefore provide for automatic flossing between teeth and over gums.

Although the embodiment shown with reference to Figures 1 to 7 is adapted to be attached to a toothbrush driver, typically comprising a battery powered electric motor and associated drive train assembly, nevertheless it will be appreciated that such, and those to be described in Figures 8 to 10, may be incorporated integrally with the flosser attachment, in accordance with a second aspect of the invention.

As will be apparent from, particularly, Figure 4, when the clamp platform 10 and associated clamp jaws 11, 13 and 12, 14 oscillate about the axis of the drive shaft 21 the length of floss 3a trapped therebetween immediately adjacent the clamp platform 10 oscillates to a corresponding degree. Although in the embodiment described the positioning of the platform 10 about the axis of the drive shaft 21 is perfectly symmetrical, in alternative embodiments of the invention the platform 10 may instead be positioned further forward or further back relative to the major axis of the flosser attachment to thereby vary the amount of oscillation of the floss 3a in this region.

In a further refinement, slideable clamp jaw 14 may be dimensioned to cause it to engage with fixed clamp jaw 12 just before slideable clamp jaw 13 engages with fixed clamp jaw 11 such that the captured length of floss 3a is provided with a degree of tension prior to the slideable jaw clamp 13 engaging with the fixed jaw clamp 11. In an alternative embodiment, the spool of floss may be provided with a clutch mechanism to provide resistance to rotation as floss is pulled from it, thereby inherently providing a degree of tension in the captured length of floss 3a.

Where the flosser attachment or electrically powered flosser, as the case may be, is not intended to be a disposable item such that replacement spools of floss may be provided, an openable cover may be provided to allow for insertion and removal of the spool as required.

Turning now to Figures 8a, 8b and 9a, 9b, there is shown an alternative quick release mechanism utilising an over-centre cam locking arrangement. A clamp platform 10a is again provided with fixed clamp jaws 11a, 12a and slideable clamp jaws 13a, 14a, the latter pair of clamp jaws being linked via drive links 39, 40 to a clamp actuation plate 41 fixed for rotation about, but not with, drive shaft 21a. The plate 41 has diagonally opposite cam surfaces 43, 44 which engage the innermost surfaces of the slideable clamp jaws 13a, 14a, such that when the plate 41 is rotated anticlockwise in the direction arrowed by turning the knob 15a, to which it is secured for rotation therewith, the moveable clamp jaws 13a, 14a engage the fixed clamp jaws 11a, 12a and as the knob 15a continues to rotate the links 39, 40 assume the over-centre position past centre-line c-c shown in Figure 8b, in which position dental floss (not shown) is

releasably secured between the clamp jaws 11a, 13a and 12a, 14a.

As shown in Figure 9b, being a part section along the line y-y of Figure 9a, the slideable clamp jaw 13a is retained in position between the side walls 16a, 17a by being flanged at its lower end so as to be retained within corresponding recesses in the lower ends of the side walls 16a, 17a and, likewise, slideable clamp jaw 14a is also retained in the same manner on the opposite side of the moveably mounted platform 10a.

A further embodiment of the invention is shown schematically in Figure 10 where a different mechanism is used to move the slideable clamp jaws 13b, 14b into and out of engagement with the fixed clamp jaws 11b, 12b. In this arrangement a slotted clamp actuation disc 45 is mounted for rotation on the platform 10b, the slots 46, 47 each spiralling gently outwards from the central axis of the drive shaft 21b. The moveable clamp jaws 13b and 14b in this embodiment are each connected to respective clamp plunger rods 48, 49 (shown in dotted outline) received within a correspondingly shaped bore within the platform 10a, the plunger rods 48, 49 having at their ends respective drive pins 50, 51 which extend into and engage with the inner walls of these spiral slots 46, 47 such that rotation of the disc 45 anticlockwise in the direction arrowed forces the plungers 48, 49 and hence the moveable clamp jaws 13b, 14b outwards in opposite directions towards respective fixed clamp jaws 11b and 12b at which position it will be understood that due to the length of the slots 46, 47 there is sufficient frictional resistance in the system to ensure that a length of floss 3a can be trapped therebetween until the disc 45 is rotated in the clockwise direction to release the plungers 48, 49 and hence moveable clamp

jaws 13b, 14b.

It will be seen that the third embodiment of the invention has relatively few moving parts which may also be relatively robust and easy to clean, as well as being relatively simply to manufacture, whether it be incorporated as part of a flosser attachment for a toothbrush driver or as part of a flosser which
5 incorporates its own motor and drive mechanism.

Whilst all three embodiments of the invention thus far described are believed to offer novel and practical devices for dental flossing it will be understood that variations thereof may be possible without departing from the
10 spirit and scope of the invention.

THIS PAGE BLANK (USPTO)

1/9

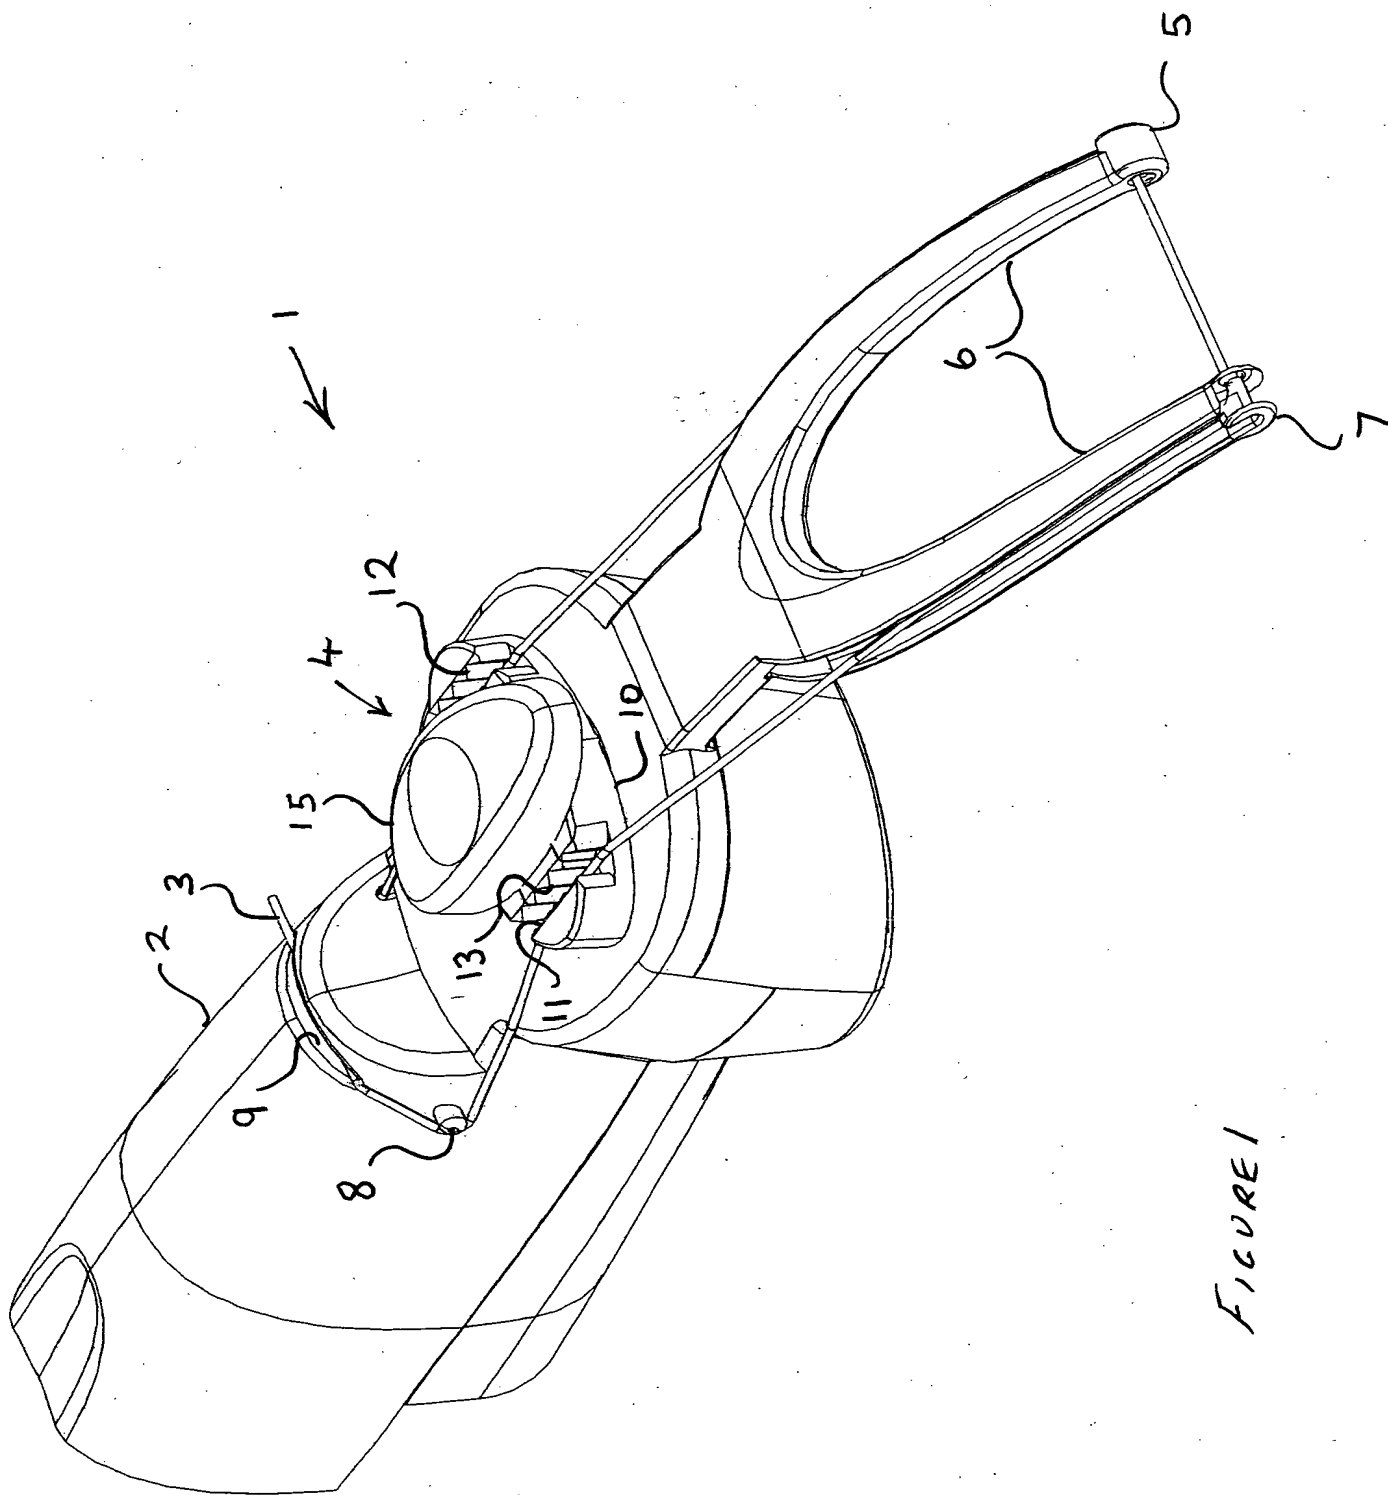


FIGURE 1

THIS PAGE BLANK (USPTO)

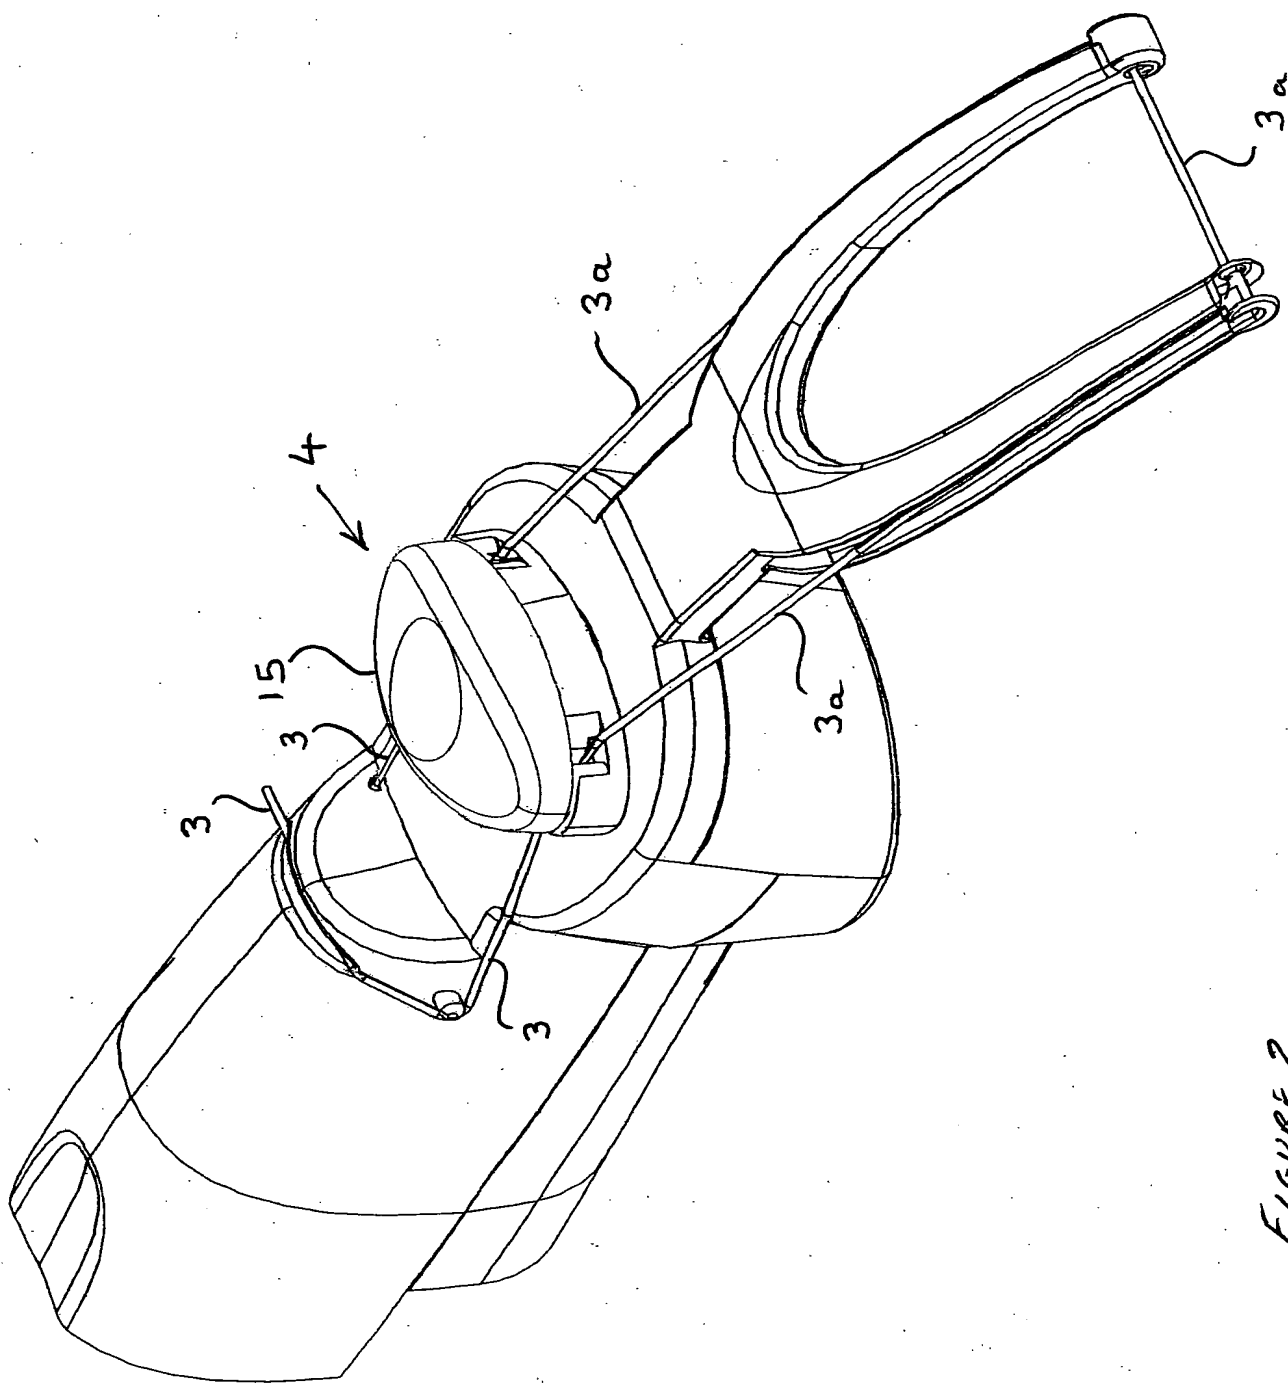


FIGURE 2.

THIS PAGE BLANK (USPTO)

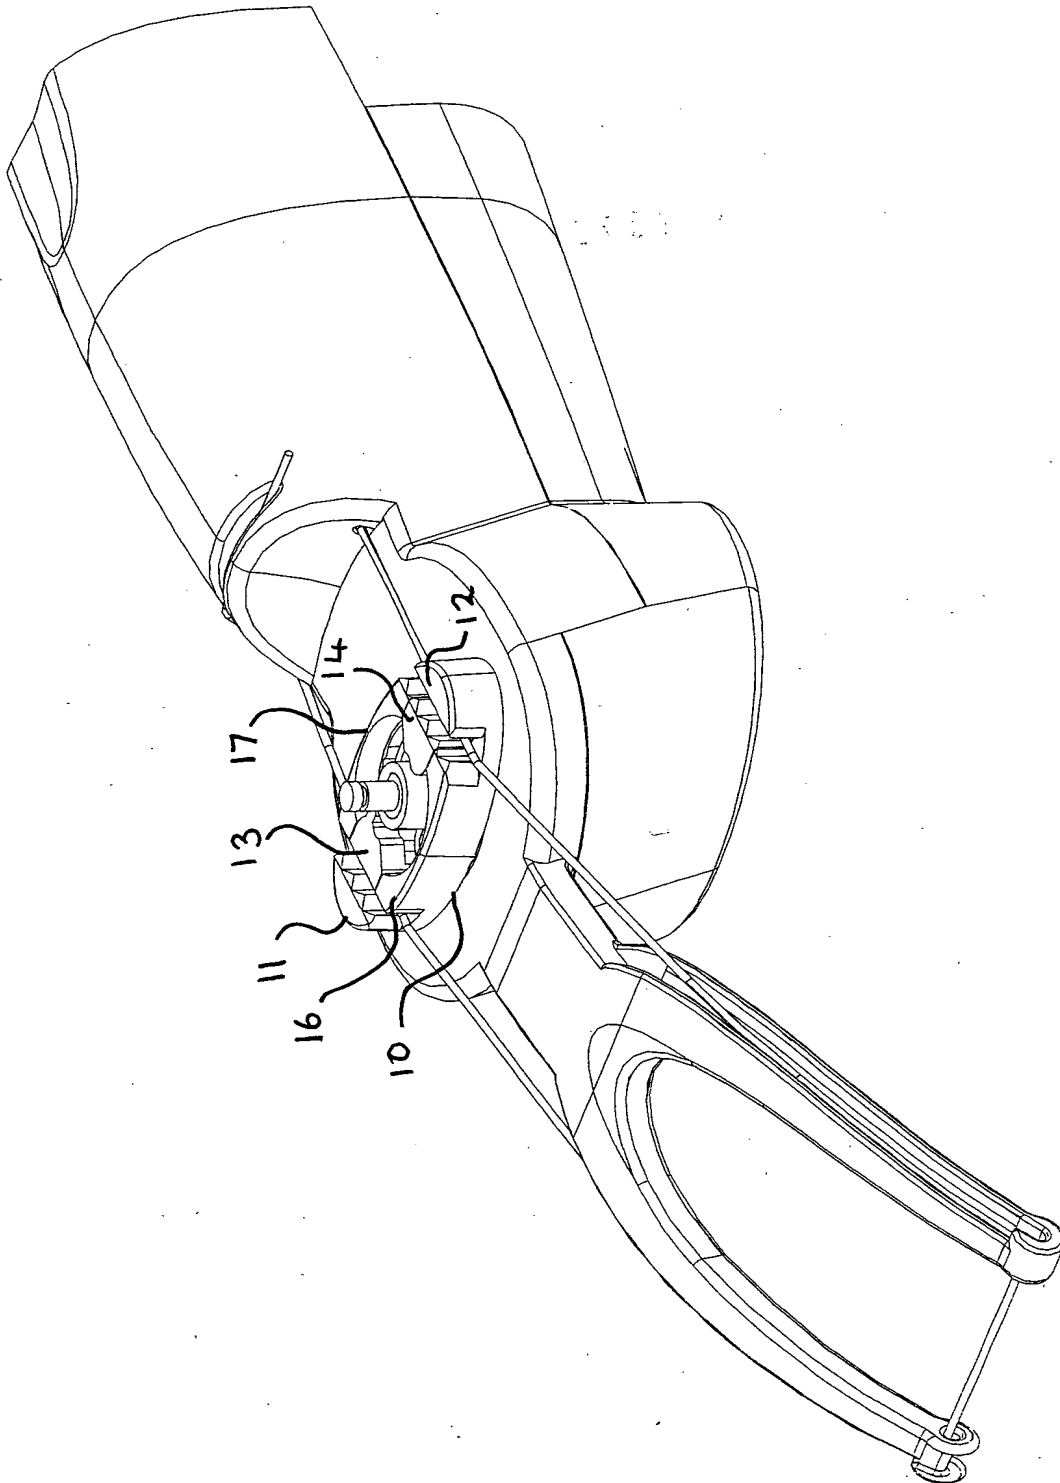


FIGURE 3

THIS PAGE BLANK (USPTO)

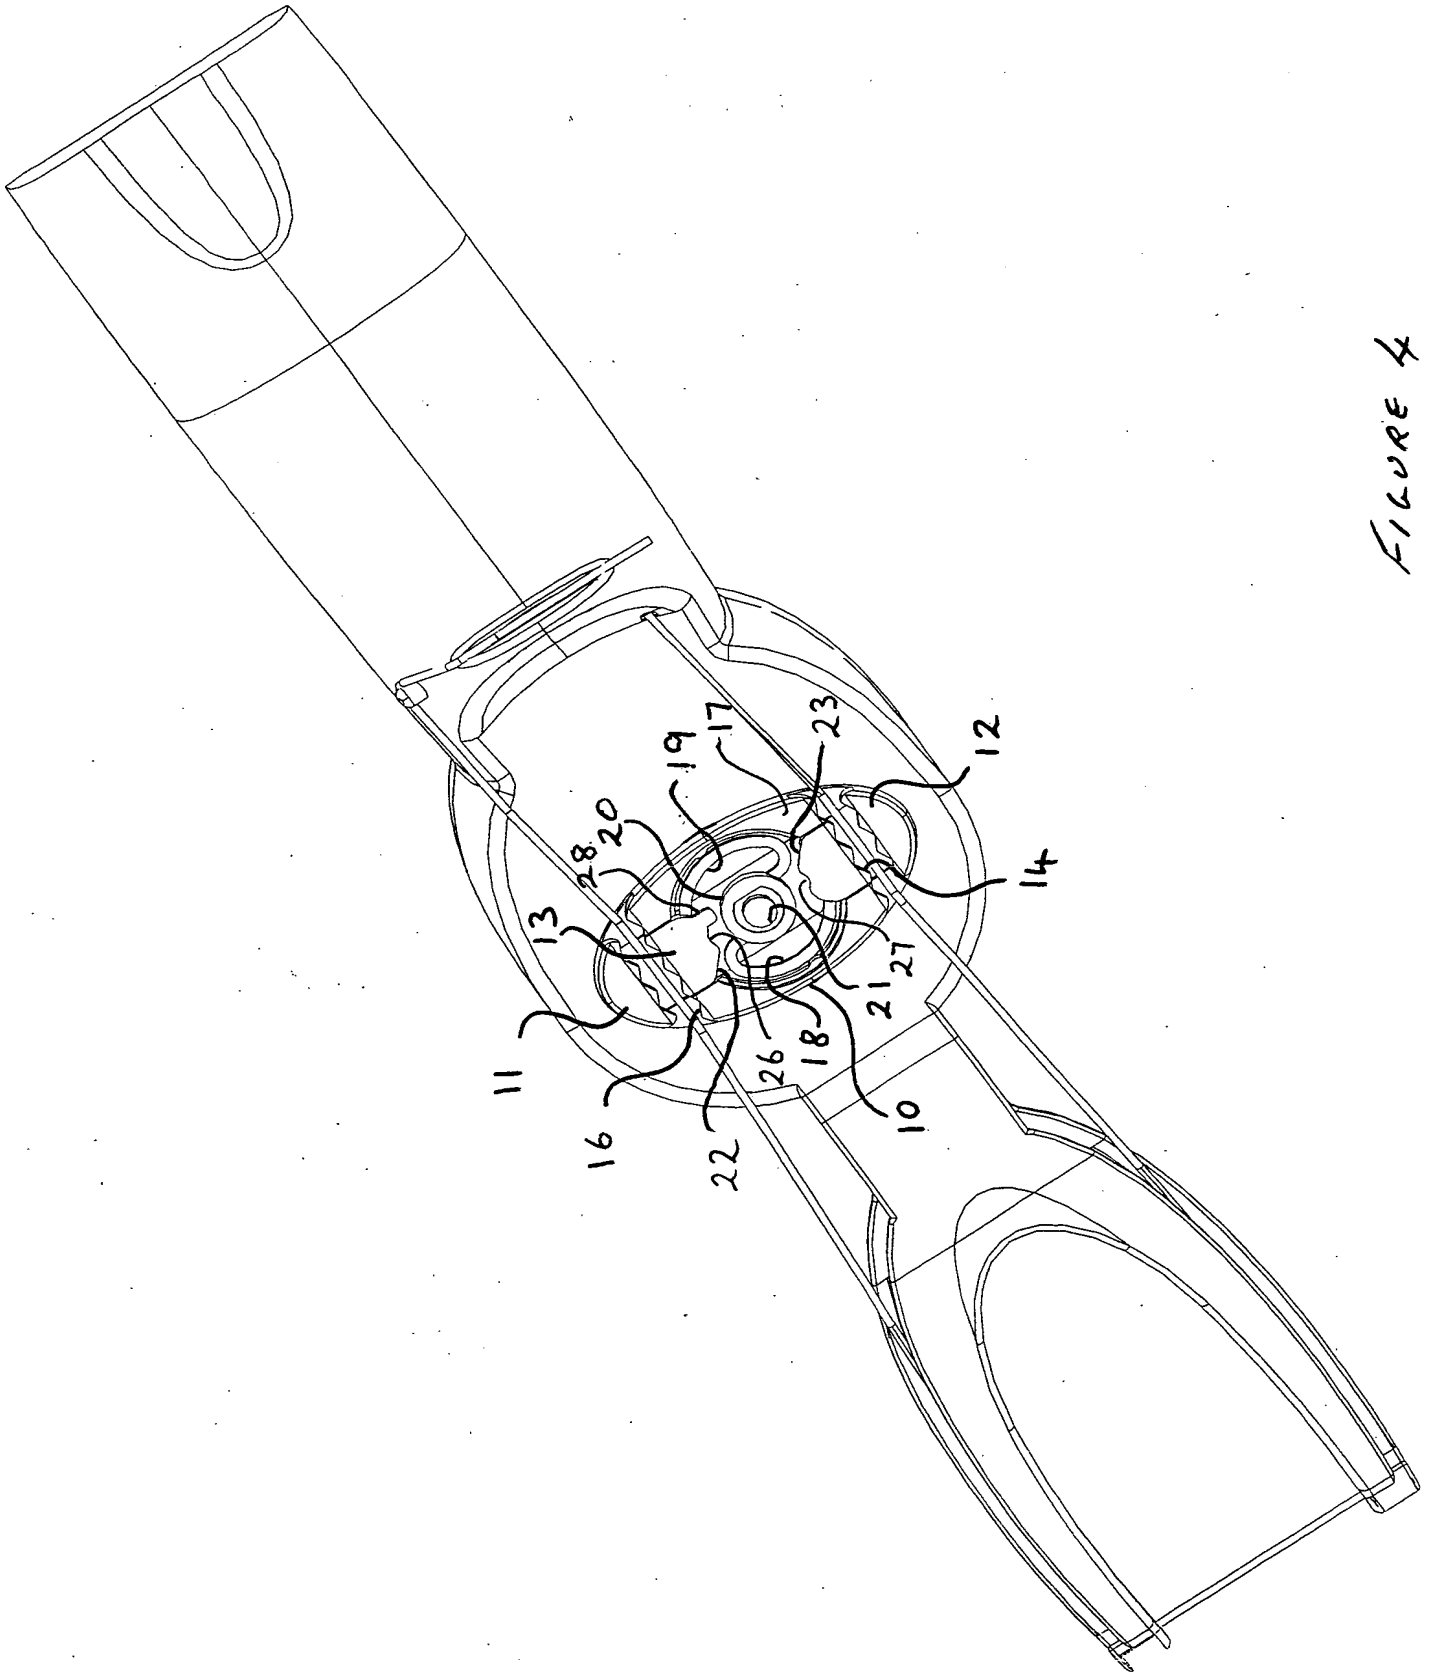


FIGURE 4

THIS PAGE BLANK (USPTO)

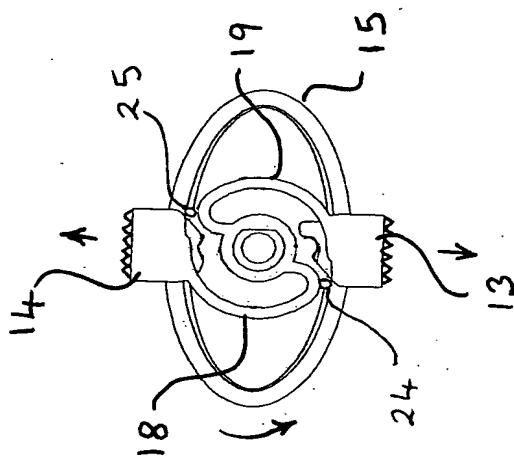


FIGURE 5

THIS PAGE BLANK (USPTO)

6/9

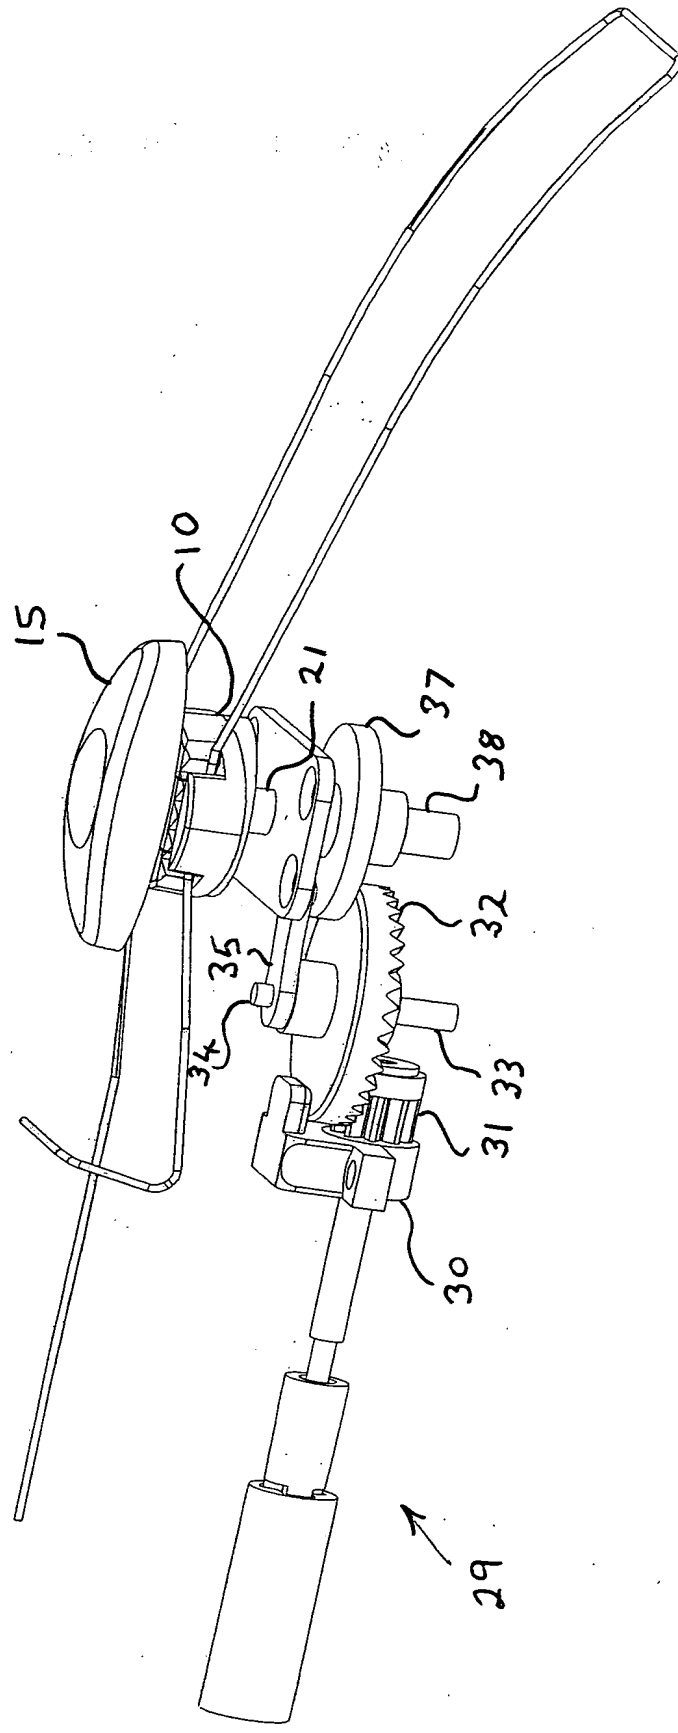


FIGURE 6

THIS PAGE BLANK (USPTO)



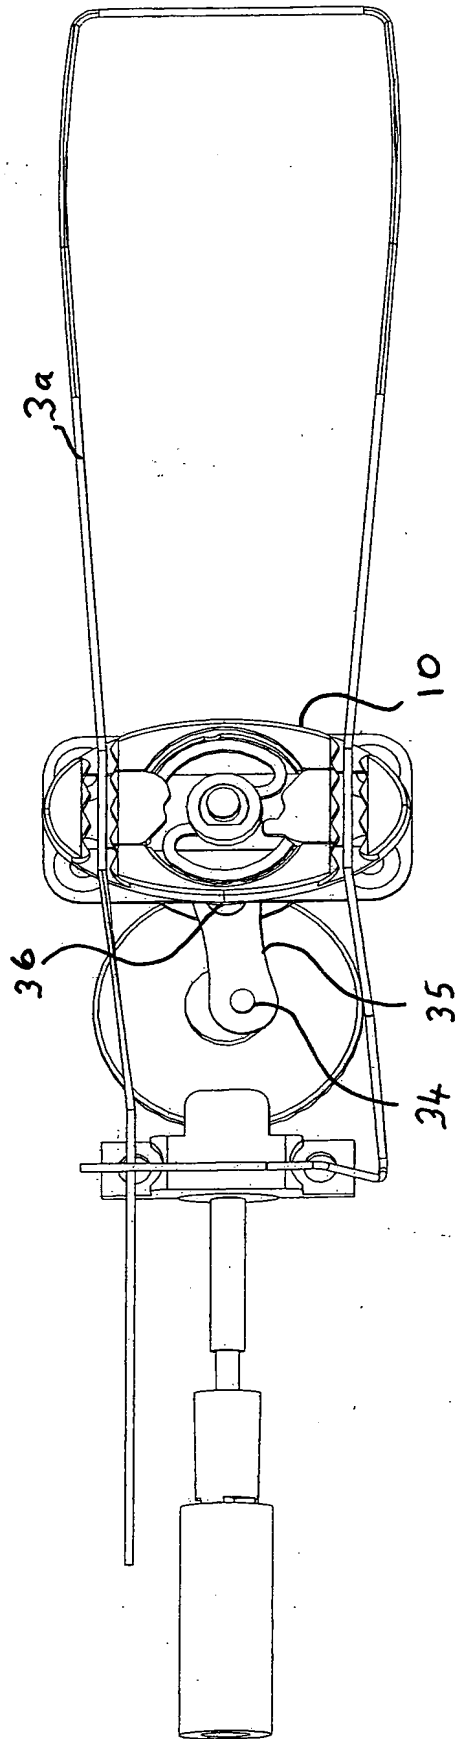


FIGURE 7

THIS PAGE BLANK (USPTO)

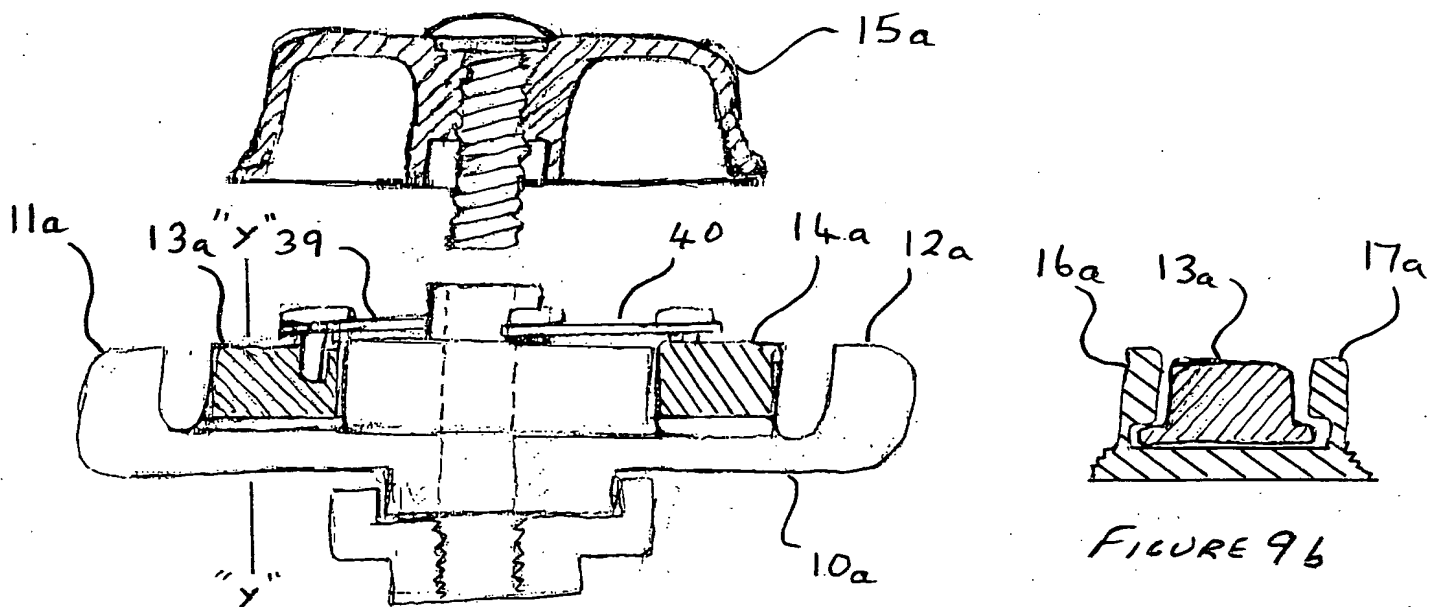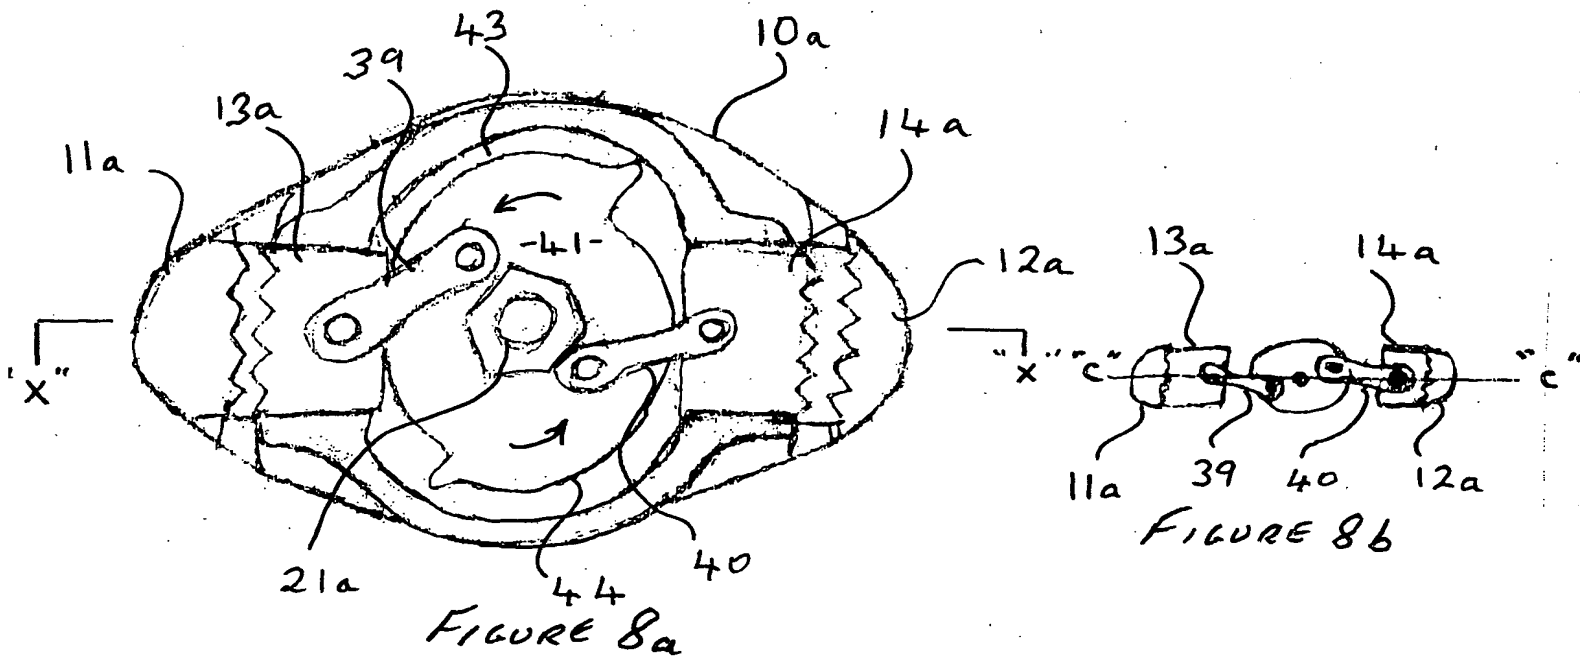

THIS PAGE BLANK (USPTO)

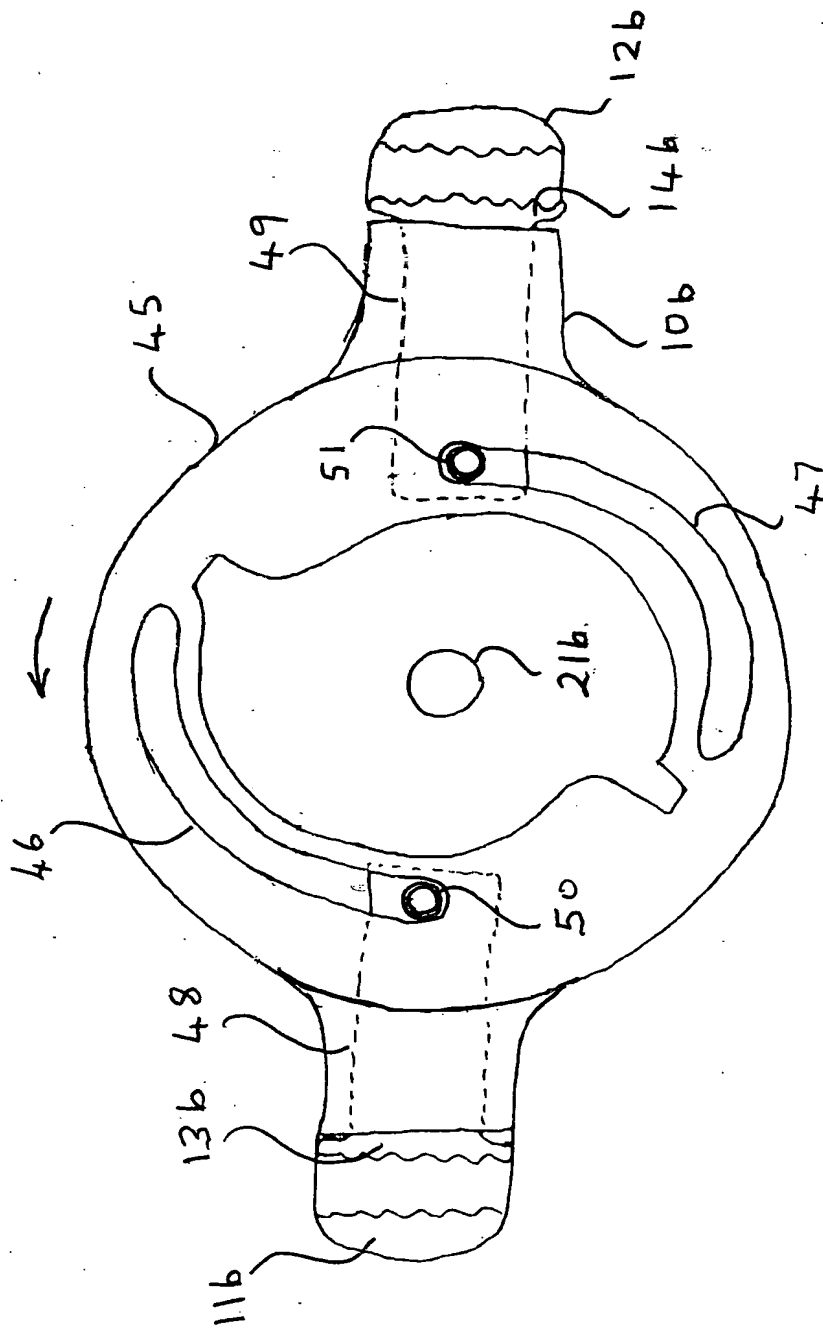


FIGURE 10

THIS PAGE BLANK (USPTO)